


DATASHEET

Thermal Protector C02

Type series 02

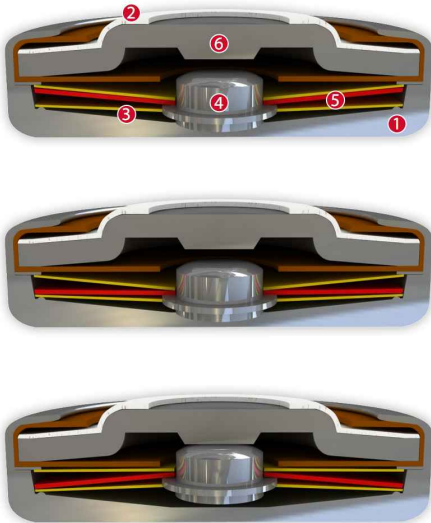

Construction and function

The switchgear of type series 02 is fixed in a positive lock and is self-aligning between the floor of a conductive housing (1) and a contact cap which is made of steel (2) and insulated from it, plus an integrated stationary silver contact (6) which closes the housing like a button cell. By means of a throw force a bimetallic disc (5) pushes the movable contact (4) that sticks out in the middle of it onto its circumferential collar (6) against the spring snap-in disc (3) that is also surrounding the contact (4). Due to the higher throw force of the bimetallic disc (5) the switch contact remains open against the mechanical resistance of the spring snap-in disc (3) before reaching the rated switching temperature. As such, the contact also remains open as long as the bimetallic disc – only reacting to the ambient temperature – continually works and its shape changes. The bimetallic disc (5) only snaps into its inverted position when the rated switching temperature is reached and the contact is closed by the abruptly released pressure of the spring snap-in disc (3). The spring snap-in disc (3) is now a transfer element for electric current and as such, it enables the bimetallic disc (5) to continue to work on a continuous basis. When the reset temperature is reached, the bimetallic disc snaps back into its start position and the contact is opened again.

Features:

Specially flat design	to fit closely built-up circuits
Quick response sensitivity	Featured by small protector mass and the metal-housing
Excellent long term performance	due to instantaneous switching, fine silver contacts, constant contact resistance and to electrically as well as mechanically unstressed bimetallic disc, reproducible switching temperature values
Instantaneous switching	always with the same contact pressure up to reset point; resulting in low contact stress
Very short bounce times	< 1 ms
Temperature resistance	by use of high temperature resistant materials and components



Technical Data Type C02

The listed products are an extract from our standard range. Other versions and customised manufacturing are available upon request.

C02

Type: Normally open; resets automatically; with connector cables; with or without epoxy; without insulation



Installation height h from 3,9 mm
Diameter d 9,0 mm

Nominal switching temperature (NST) in 5 °C increments		60 °C - 200 °C
Tolerance (standard)		±5 K
Reverse Switch Temperature (defined RST is possible at the customer's request)	UL	≥ 35 °C (≤ 80 °C NST) -35 K ± 15 K (≥ 85 °C ≤ 180 °C NST)
	VDE	-65 K ± 15 K (≥ 185 °C ≤ 200 °C NST) ≥ 35 °C
Installation height		from 3,9 mm
Diameter		9,0 mm
Resistance to impregnation *		suitable
Suitable for installation in protection class		I
Pressure resistance to the switch housing *		450 N
Standard connection		Lead wire 0,25 mm ² / AWG22
Available approvals (please state)		IEC; ENEC; VDE; UL; CSA; CQC; CMJ
Operating voltage range AC		up until 500 V AC
Rated voltage AC		250 V (VDE) 277 V (UL)
Rated current AC cos φ = 1.0/cycles		2,5 A / 10.000
Rated current AC cos φ = 0.6/cycles		1,6 A / 10.000
Total bounce time		< 1 ms
Contact resistance (according to MIL-STD. R5757)		≤ 50 mΩ
Vibration resistance at 10 ... 60 Hz		100 m/s ²

Ordering example:

C02 - 125. 05 0100 / 0100

Type / version _____
 NST [°C] _____
 Tolerance [K] _____
 Lead lengths [mm] _____ P₁ P₂

Marking example:

 **thermik**
 Trade mark _____
 Type / version _____ **02**
 NST [°C] . Tolerance [K] — **125.05**

More varieties of the type series 02:

- S02 – with connector cables; with or without epoxy; insulation: Mylar®-Nomex®
- L02 – with connector cables; with epoxy; fully insulated in a screw on housing
- N02 – with a connection wire; partially insulated in a plastic cap
- C02 Pin – with pins; with epoxy; without insulation

www.thermik.de/data/S02
www.thermik.de/data/L02
www.thermik.de/data/N02
www.thermik.de/data/C02-Pin

*In accordance with the Thermik Inc. specifications relating to part applications (on the part of the buyer) which deviate from our standards are not checked for their capacity to support an application as specified. The manufacturer is not responsible for any damage or loss of data caused by the use of the product. We reserve the right to make technical changes in the course of further development. *Pinak: concerning certain data, measurement methods, applications, approvals, etc. can be supplied upon request.